


# ROADRUNNER™ HD CAMERA, EXTERIOR DOME

ON-BOARD VIDEO SECURITY SYSTEM

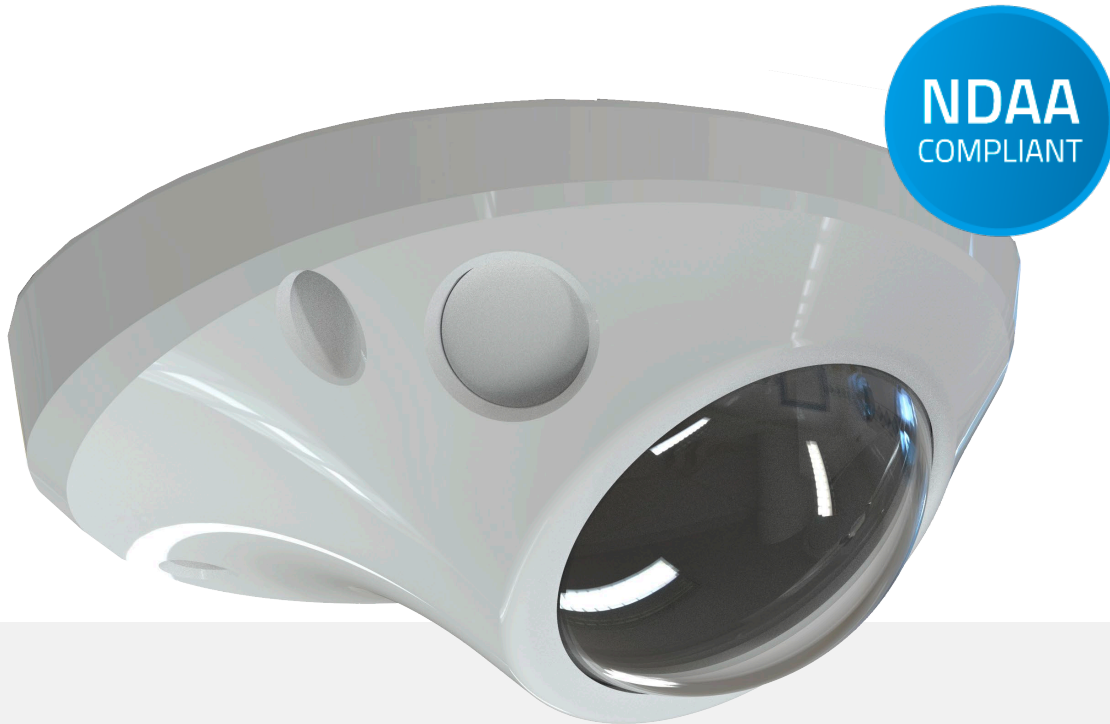

## FEATURES

- Full HD (1080p) Resolution
- Vandal and Impact Resistant
- IP67 Rated
- Exceptional Field of View
- NDAA Compliant

## AUTO-CONNECT POE, IP CAMERA

Specifically designed and manufactured for transit applications, RoadRunner HD cameras are auto-connecting, resulting in simple installation and maintenance – programming and IP configuration is automatic.

## RUGGED AND RELIABLE

Providing the highest quality recording in a rugged and vandal resistant enclosure, the exterior wedge camera is designed for optimal viewing and flexibility for exterior locations.

# ROADRUNNER™ HD CAMERA, EXTERIOR DOME

## TECHNICAL DATA

Order Information	
Order Number North America	RR-HDCD135 (137° Field of View)
Electrical Properties	
Operating Voltage	48 VDC
Power Consumption	6.3 W Max
Interfaces	
Ethernet	1, 10/100 Mbps, RJ-45
POE Class	PoE (IEEE 802.3af Class 2)
Mechanical Properties	
Weight	0.378 kg, 0.83 lbs
Dimensions	104 mm x 49.44 mm x 122.7 mm, 4.09" x 1.95" x 4.81"
Environment	
Operating Temperature	-40°C to 60°C, -40°F to 140°F
Ingress Protection	IP67
Impact Protection	IK10
Standards	
NDA	✓
SAE J1455	✓
MIL-STD-810G	✓
FCC	✓
CE	✓
Image	
Image Sensor	1/2.8" CMOS
Field of View	137.7° Horizontal; 75.4° Vertical
Video Output	1 CVBS (BNC) Analog Video Output
Compression	H.265, H.264 (MP) M-JPEG,
Resolution	16:9 – 1920x1080, 1280x720, 640x360, 352x240 4:3 – 1440x1080, 960x720, 480x360, 272x240
Scanning System	Progressive Scan
Light Sensitivity Black/White	0.24 Lux @ F2.3
Light Sensitivity Color	0.17 Lux @ F2.3
Signal-To-Noise-Ratio	45 dB or Higher
Dynamic Range	120 dB (True WDR)